


Machine Configuration

Choose **Machine Config** to assign each machine ID to an equipment type [as configured earlier](#)

i Prior to this step it is advisable to walk the location with the cabling layout provided by CCI and identify the equipment types and locations for all the machines on the drawing. These steps **MUST** be done on the X-Changer and cannot be done remotely.


1. Insert Manager Card.
2. Select **System Setup**.
3. Select **Card Reader Setup**
4. Select **Machine Config**

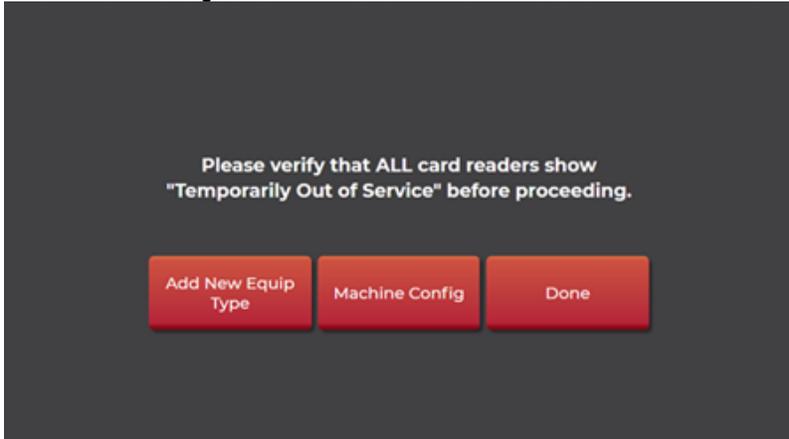

This is the Machine Overview Page. This page sets the equipment to the correct machine number and the correct Line the machine is on.

! Pay close attention to the line number that the equipment is on. Also remember washers start at 001, dryers start at 101 and accessory devices start at 201.

1. Touch or click on the first Machine ID on the list.

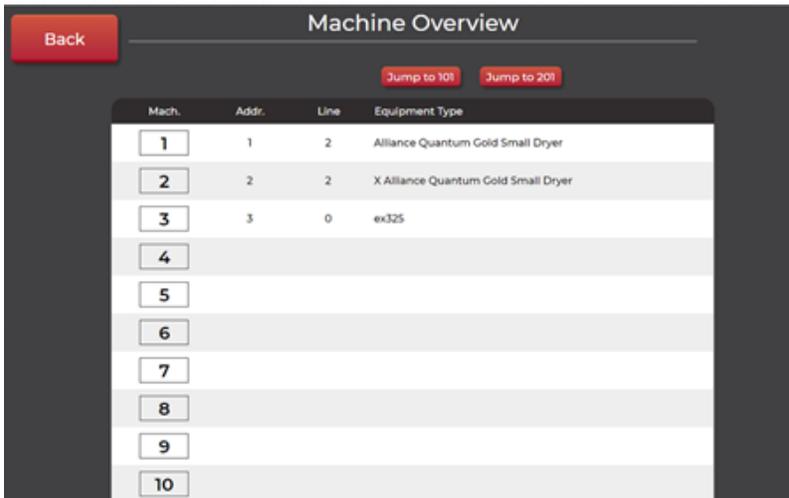

2. Referencing the store layout that was provided with the system, complete the fields on this page.

3. Once complete, choose **Save**, then **Next** to move to the next numeric machine ID and repeat step 2. **You must click SAVE and NEXT after each Equipment Type has been entered or it will not save the previously entered information.**



BE SURE TO INCLUDE ANY ACCESSORY DEVICES WHEN CONFIGURING HARDWARE, SUCH AS DOORS, VENDING MACHINES, ETC.

1. Once complete with all machine types as identified on the store layout, click **Back** and then **Done**.

Field	Description
Card Reader Address	The number of the machine in the row.
Line Number	The line number the machine is on. (Example Line 0)
Equipment Type ID	This can be found in the list below the fields.

Your equipment should be ready to start. At this time, **assuming all readers have been programmed** and if the information was entered correctly, the readers will start to download the appropriate firmware. This may take approximately 15 minutes.

If the readers complete the download and the readers continue to say, "See Attendant", there may be an error in the configuration and the equipment setup should be checked for accuracy. If the issue persists, **Contact CCI technical Support at (630) 930-5115.**